


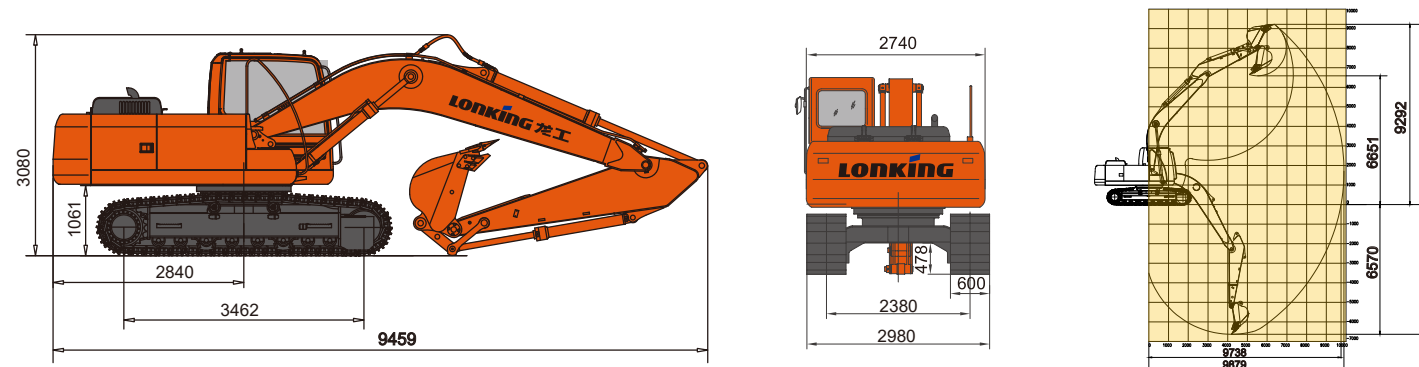

TECHNICAL PARAMETERS

Name		Data
Basic	Operating weight	21800 kg
	Boom length	5675 mm
	Arm length	2920 mm
	Standard bucket	1.0 m³
	Max.Travel speed	3.1/5.3 km/h
	Max.Swing speed	13.5 rpm
	Grade ability	35°(70%)
	Ground pressure	47.5 kPa
	Max.Traction force	218 kN
Engine	Engine model	6BTAA5.9-C150-II
	Rated power	112 kW/1950 rpm
	Max.Torque	614/1500 N.m/rpm
	Displacement	5.9 L
	Fuel tank	400 L
Hydraulic	Max.Flow(total)	280×2 L/min
	Max.Working pressure	34.3/37 Mpa
	Max.Pilot pressure	3.9 Mpa
	Max.Arm digging force	107 kN(ISO)
	Max.Bucket digging force	142 kN(ISO)
	Hrdraulic oil tank	165/256 L
Chassis	Track width	600 mm
	Track shoes number	47(each side)
	Carrier rollers number	2(each side)
	Track rollers number	8(each side)
Electric	System vottage	24 V
	Battery capacity	24 V,120 Ah×2

PRODUCT FEATURES

Cummins TDI 4-cylinder Engine. Strong Power, Fuel-efficient
Three-stage Air & Fuel Filtering System
Charge air Cooling System with Parallel Radiator
Advanced Hydraulic System with Function of Interflow & Re-activation, Swing Priority
8 inch LCD Display with Multi Purpose
Camfortable ROPS Cabin with 2.7m³ Operational Space
No Frame Cab Glasses to Enlarge Operation Field of View
Heavy-duty Working Device with High Strength Low Alloyed Steels

OPTIONAL

Breaking hammer & pipeline
Work warning light
Walking alarm
MP3
Top protecting net
Front protecting net
700mm triple grouser shoes
800mm triple grouser shoes
Track rubber block

Lonking 龙工

CDM6225

HYDRAULIC EXCAVATOR

Efficiency Rules the Future



INTERTRAC

Material Handling ☎ 900 818 978

www.carretillasintertrac.com

OPERATING WEIGHT:	21800kg
ENGINE POWER:	112kW
BUCKET CAPACITY:	1.0 m³
TRAVEL SPEED:	3.1/5.3km/h