


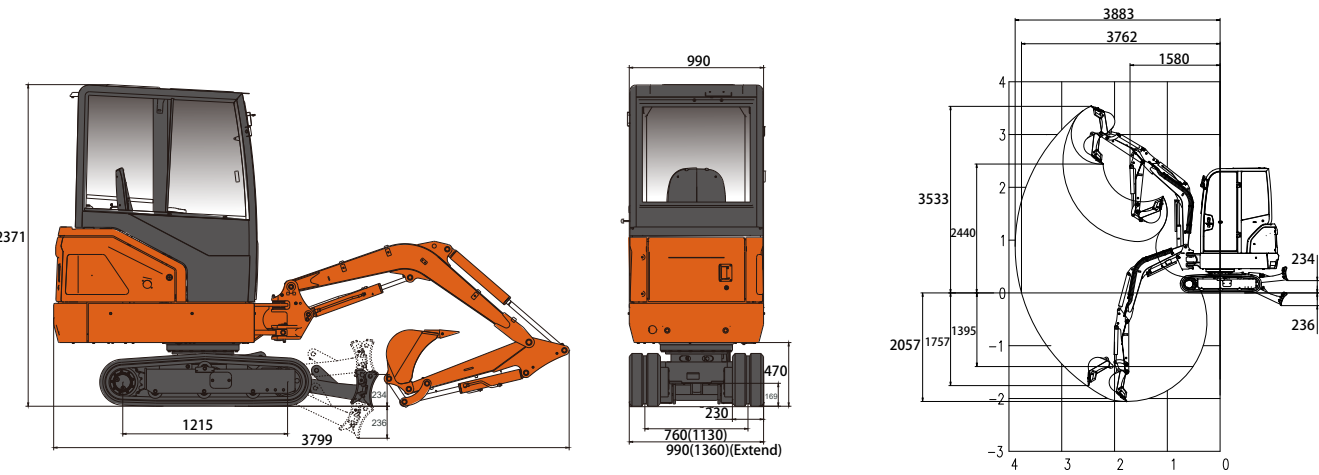

TECHNICAL PARAMETERS

Name		Data
Basic	Operating weight	2000 kg
	Standard bucket Capacity	0.04 m³
	Standard bucket Width	380 mm
	Max.Travel speed	2.5/4.5km/h
	Max.Swing speed	10 rpm
	Grade ability	30°
	Ground pressure	30 kPa
	Max.Traction force	16.7 KN
	Boom swing angle (L/R)	65°/47°
Engine	Engine brand	YANMAR
	Engine model	3TNV80F-SSLKC
	Rated power	13.4 kW/2200 rpm
	Displacement	1.267 L
	Fuel tank	21 L
Hydraulic	Max.Flow(total)	62 L/min
	Max.Working pressure	21 MPa
	Max.Pilot pressure	3.2 Mpa
	Max.Arm digging force	12 kN
	Max.Bucket digging force	21 kN
	Hrdraulic oil tank	26 L
Chassis	Track width	230 mm
	Track type	steel crawler
	Carrier rollers number	1(each side)
	Track rollers number	3(each side)
Electric	System voltage	12 V
	Battery capacity	12 V,70Ah

PRODUCT FEATURES

- Yanmar strong power engine,which meet U.S. EPA Tier 4 Final, EU Stage V emission standards.
- Hydraulic control elescopic chassis designed for narrow and complicated working conditions.
- Wider space and view are provided by enlarged front windscreen and sunroof.
- Clear monitoring instrument that is easy to operate and check.
- The tail hood can be opened to a large degree which makes easier daily inspection and change of filters.
- Retractable chassis , good trafficability and more stable.

OPTIONAL EQUIPMENT

- Front safeguard
- Fops/Tops canopy
- 260mm width bucket
- 600/1000mm width bucket
- Quick hitch pipeline
- 230mm Rubber tracks

Lonking 龙工

CDM6020
HYDRAULIC EXCAVATOR
Efficiency Rules the Future



INTERTRAC

Material Handling ☎ 900 818 978

www.carretillasintertrac.com

- OPERATING WEIGHT: 2000kg
- ENGINE POWER: 13.4kW
- BUCKET CAPACITY: 0.04m³
- TRAVEL SPEED: 2.5/4.5km/h