


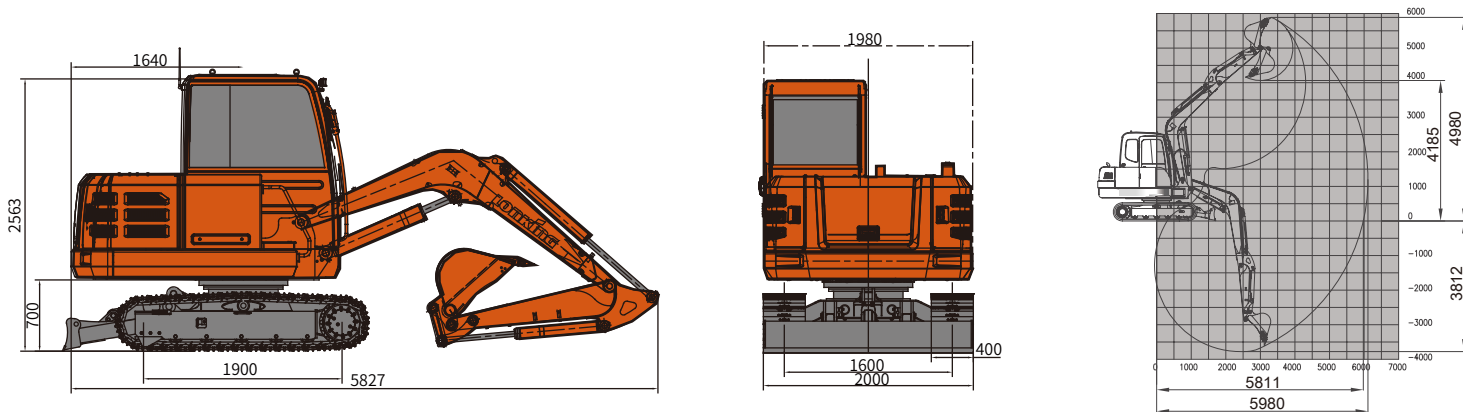

TECHNICAL PARAMETERS

Name		Data
Basic	Operating weight	5850 kg
	Boom length	3000 mm
	Arm length	1550 mm
	Standard bucket	0.25 m³
	Max.Travel speed	2.5/4.2 km/h
	Max.Swing speed	10.5 rpm
	Grade ability	35°(70%)
	Ground pressure	34.5 kPa
	Max.Traction force	51.5 kN
Engine	Engine model	4TNV94L
	Rated power	36.2 kW/2100 rpm
	Max.Torque	211.8 N.m/rpm
	Displacement	3.054 L
	Fuel tank	130 L
Hydraulic	Max.Flow(total)	151 L/min
	Max.Working pressure	24.5 MPa
	Max.Pilot pressure	3.4 Mpa
	Max.Arm digging force	28 kN(ISO)
	Max.Bucket digging force	40 kN(ISO)
	Hrdraulic oil tank	80 L
Chassis	Track width	400 mm
	Track shoes number	38(each side)
	Carrier rollers number	1(each side)
	Track rollers number	5(each side)
Electric	System vottage	12 V
	Battery capacity	12 V,100 Ah

PRODUCT FEATURES

Yanmar inline 4-cylinder, four-stroke engine with high-pressure common rail electronically controlled fuel injection system
High efficiency dual air and fuel filters
Parallel radiator cooling system
LUDV power balanced hydraulic system
Large LCD monitor and advanced electronic monitoring system
Safe and comfortable cab, ergonomic design
No frame cab glasses to enlarge the visual field
Working device adopts low alloy and high strength structural steel.

OPTIONAL

0.1m³ narrow bucket
0.33m³ loading bucket
Breaking hammer & pipeline
Quick coupler pipeline
Work warning light
Walking alarm
Top protecting net
Front protecting net
500mm triple grouser shoes
600mm triple grouser shoes
Track rubber block

Lonking 龙工

CDM6060N

HYDRAULIC EXCAVATOR

Efficiency Rules the Future



INTERTRAC

Material Handling ☎ 900 818 978

www.carretillasintertrac.com

OPERATING WEIGHT:	5850kg
ENGINE POWER:	36.2kW
BUCKET CAPACITY:	0.25m³
TRAVEL SPEED:	2.5/4.2km/h