
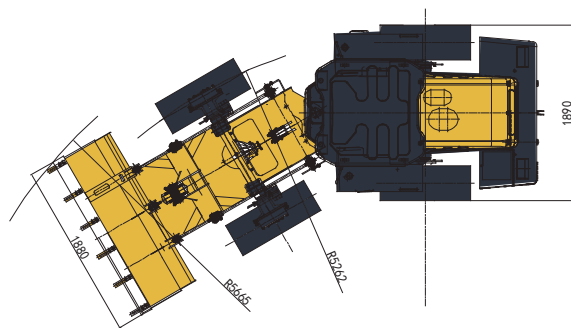


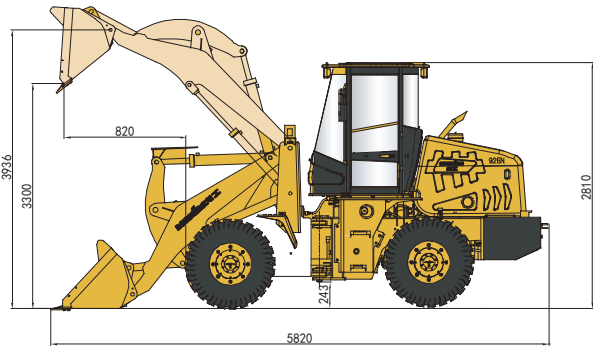

TECHNICAL PARAMETERS

BASIC	Bucket Capacity	0.65m³
	Rated Payload	1200kg
	Operating Weight	4370kg
	Traction Force	39kN
	Breakout Force	28kN
	L×W×H	5820×1890×2810mm
ENGINE	Manufacturer/Model	YN27 (Nation II)
	Rated Power	36.8kW/2400rpm
	Rated Torque	245N·m/1600-1800rpm
DRIVE TRAIN	Transmission Type	Countershaft Powershift
	Shift Type	Fixed Shaft Hydraulic Shift Spur Gear
	Pressure of Transmission	1.2-1.5MPa
	Gear	2F/2R
	Torque Converter	Single-stage, Single-turbine, 3-element
	Torque Ratio	3.7
	Main Reducer	Spiral Bevel Gear Single-stage Reduction
	Final Reducer	Planetary Reduction
	Tire	16/70-16
	Travel speed-Forward	16km/h
BRAKE SYSTEM	Service Brake	Air Drive, Four Wheel Brake (Dry)
	Setting Pressure	0.78MPa
	Parking Brake	Flexible Shaft Controlled Drum Brake
STEERING SYSTEM	Type	Hydraulic Load Sensor System
	Steering Pump	Shared With Working Pump
	System Pressure	14Mpa
	Steering Angle	±35°
HYDRAULIC SYSTEM	Type	Pilot Control
	Working Pump	Gear Pump
	Flow Rate	100L/min·2400rpm
	Control Valve	2 Spool
	System Pressure	16MPa
	Cycle Time (Sec)	8.23
ELECTRIC SYSTEM	System Voltage	24V
	Battery (2 in series)	2x55 Ah
SERVICE REFILL CAPACITY	Fuel Tank	90L
	Hydraulic Tank	60L
	Transmission	17.5L
	Front Axle / Rear Axle	20L

CONFIGURATION

YUN NEI Engine
LONKING Transmission
LONKING Torque Converter
Dry Brake Drive Axle
Pilot Working Control
Air conditioner
Standard Working Equipment

OPTIONAL

Standard Bucket (3 Piece Cutting Edges)
Standard Bucket With an Integral Cutting Edge
Standard Bucket with Detachable Bucket Teeth
Enlarge Bucket 1.2m³ ,Detachable bucket Teeth
High Dump
3rd Spool for Auxiliary Function
Hydraulic Quick Hitch
Hydraulic Quick Hitch Bucket

LONKING 龙工

CDM926N WHEEL LOADER

Efficiency Rules the Future



INTERTRAC

Material Handling ☎ 900 818 978

www.carretillasintertrac.com

■ RATED POWER:	36.8kW/2400rpm
■ BUCKET CAPACITY:	0.65 m³
■ RATED PAYLOAD:	1200kg
■ OPERATING WEIGHT:	4370kg