

2MK20-25							2MK30-40							
Mast Type	Mast Model	Lifting Height	Mast Closed Height	Mast Extended Height	Free Lifting Height (with load backrest)		Mast Model	Lifting Height	Mast Closed Height	Mast Extended Height	Free Lifting Height (with load backrest)			
	mm						mm							
	Model➤2MK				20	25	Model➤2MK				30	35	38	40
Duplex Mast	60L	6000	3630	7060	150	150	60L	6000	3745	7190	155	160		
	55L	5500	3380	6560	150	150	55L	5500	3495	6690	155	160		
	50L	5000	3080	6060	150	150	50L	5000	3195	6190	155	160		
	45L	4500	2830	5560	150	150	45L	4500	2945	5940	155	160		
	40L	4000	2580	5060	150	150	40L	4000	2695	5190	155	160	160	160
	37L	3700	2380	4760	150	150	37L	3700	2495	4890	155	160	160	160
	35L	3500	2280	4560	150	150	35L	3500	2395	4690	155	160	160	160
	33L	3300	2180	4360	150	150	33L	3300	2295	4490	155	160	160	160
	30L	3000	2030	4060	150	150	30L	3000	2145	4190	155	160	160	160
	27L	2700	1880	3760	150	150	27L	2700	1995	3890	155	160	160	160
	25L	2500	1780	3560	150	150	25L	2500	1895	3690	155	160	160	160
	20L	2000	1530	3060	150	150	20L	2000	1645	3190	155	160	160	160
Duplex Full Free Mast	60Q	6000	3630	7199	2560	2560	60Q	6000	3745	7199	2540	2545		
	55Q	5500	3380	6699	2310	2310	55Q	5500	3495	6699	2290	2295		
	50Q	5000	3080	6199	2010	2010	50Q	5000	3195	6199	1990	1995		
	45Q	4500	2830	5699	1760	1760	45Q	4500	2945	5699	1740	1745		
	40Q	4000	2580	5199	1510	1510	40Q	4000	2695	5199	1490	1495	1495	1495
	37Q	3700	2380	4899	1310	1310	37Q	3700	2495	4899	1290	1295	1295	1295
	35Q	3500	2280	4699	1210	1210	35Q	3500	2395	4699	1190	1195	1195	1195
	33Q	3300	2180	4499	1110	1110	33Q	3300	2295	4499	1090	1095	1095	1095
	30Q	3000	2030	4199	960	960	30Q	3000	2145	4199	940	945	945	945
	27Q	2700	1880	3899	810	810	27Q	2700	1995	3899	790	795	795	795
	25Q	2500	1780	3699	710	710	25Q	2500	1895	3699	690	695	695	695
	20Q	2000	1530	3069	460	460	20Q	2000	1645	3199	440	445	445	445
Triplex Full Free Mast	70T	7000	2963	8060	1893	1893	70T	7000	3008	8190	1803	1808		
	68T	6800	2897	7860	1827	1827	68T	6800	2942	7990	1737	1742		
	65T	6500	2797	7560	1727	1727	65T	6500	2842	7690	1637	1642		
	63T	6300	2730	7360	1660	1660	63T	6300	2775	7490	1570	1575		
	60T	6000	2630	7060	1560	1560	60T	6000	2675	7190	1470	1475	1475	1475
	55T	5500	2463	6560	1393	1393	55T	5500	2508	6690	1303	1308	1308	1308
	50T	5000	2297	6060	1227	1227	50T	5000	2342	6190	1137	1142	1142	1142
	48T	4800	2230	5860	1160	1160	48T	4800	2275	5990	1070	1075	1075	1075
	47T	4700	2197	5760	1127	1127	47T	4700	2242	5890	1037	1042	1042	1042
	45T	4500	2130	5560	1060	1060	45T	4500	2175	5690	970	975	975	975
	40T	4000	1963	5060	893	893	40T	4000	2008	5190	803	808	808	808
	36T	3600	1830	4660	760	760	36T	3600	1875	4790	670	675	675	675

Standard configuration	Optional configuration
Inmotion controller	Curtis / ZAPI Controller
1070mm forks	LI-ION battery
Albright contactor	Customized color
Emergency stop	Widen and heighten the load backrest
Load backrest	Turning speed limit
OPS system	NFC magnetic card
Reverse buzzer	Proportional fingertips operation
Wide-angle rear-view mirror	Automatic water replenishment system
Adjustable seat and steering wheel	Cold storage
Fan (H-series)	Explosion proof vehicle
USB (H&M-series)	Long forks
Multi-valve joysticks operation	Side shifter
Lead-acid battery	Forks positioner
LED working lights	Various attachment
Silent warning light	Line-shape LED lights
Full AC system	Side pull battery
English instrument	Extinguisher
REMA /Anderson power connector	Seat belt switch
Button reversing armrest (H&M)	
Box kit	

INTERTRAC

Since 1994

MiMA®

Min. Space Max. Performance

Electric Counterbalance Forklift Truck

2MK Series

Load Capacity: 1500kg-4000kg



www.carretillasintertrac.com

2MK Series

Upgraded 4-wheel Electric Forklift(1.5t-4t)

PERFORMANCE

The drive motor adopts an advanced horizontal parallel arrangement, with the battery sinking to the bottom of the vehicle. It has a low center of gravity, good stability, and excellent turning smoothness and driving control comfort. Adopting a new concept and novel streamlined appearance design, the visual effect is improved. The vehicle is compact and simple in appearance, strong and reliable. LED headlights, turn signals, and warning lights are low in energy consumption, safe and reliable, and provide good lighting and warning for night operations.

COMFORT

Scientific ergonomically designed steering wheel and the seat is adjustable front and rear, providing the operator with the best driving position to choose. The wide field of vision mast design, which is not easy to block the line of sight and provides the operator with a broad field of vision. The new large-screen LED instrument has power display, timing and fault diagnosis functions. The human-computer interactive interface is simple and easy to understand, has excellent visibility, beautiful, elegant, and intuitive.



SAFETY

The automatic ascending&descending speed limit and descending buffer functions effectively ensure the safety of the operation, while ensuring that the goods and pallets do not impact the ground, effectively protecting the goods and the ground. Equipped with an active driver presence safety monitoring OPS system, the operation safety is effectively improved. The functions such as reverse braking and anti-slipping on slopes, making it safe and reliable.



INNOVATION

The internationally advanced MOSFET AC controller system enables the forklift's walking, steering, lifting, tilting and other actions to be controlled by computer programs. The high-frequency MOSFET integrated controller ensures smooth and accurate driving, lifting control and excellent speed regulation performance. Excellent motor-electronic control matching performance, with regenerative braking and regenerative energy (when the forklift is decelerating and going downhill, the drive motor is converted into a generator, and the battery is reverse-charged through the controller, which is energy-saving and efficient).

EFFICIENCY

The ultra-low roof guard design can meet the requirements of operating in ordinary containers and in highly limited space conditions. The hydraulic system is equipped with side shifter to adjustment operations, which effectively improves operational convenience and thus improves working efficiency.

MAINTENANCE

The AC motor is maintenance-free, with no maintenance costs such as replacing carbon brushes. The AC power system has high efficiency, complete protection functions, built-in speed sensor, temperature sensor, high reliability and long life. The battery is designed with side access, making it easy to replace and maintain the battery.



SPECIFICATION

Characteristics							
1.1	Manufacturer's Name	MiMA	MiMA	MiMA	MiMA	MiMA	MiMA
1.2	Model Designation			MK20	MK25	MK20	MK25
	Technical Code	MK20H	MK25H	MK20M	MK25M	MK20S	MK25S
1.3	Power Type	Battery	Battery	Battery	Battery	Battery	Battery
1.4	Operation Type	Seated	Seated	Seated	Seated	Seated	Seated
1.5	Load Capacity	Q(kg)	2000	2500	2000	2500	2500
1.6	Load Center Distance	C(mm)	500	500	500	500	500
1.7	Front Overhang	x(mm)	450	450	450	450	450
1.8	Wheelbase	y(mm)	1650	1650	1650	1650	1650

Tyre&Wheels							
3.1	Tyre Type	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic
3.2	Tyre Size, Front	7.00-12-14PR	7.00×12-14PR	7.00-12-14PR	7.00-12-14PR	7.00-12-14PR	7.00-12-14PR
3.3	Tyre Size, Rear	18×7-8-14PR	18×7-8-14PR	18×7-8-14PR	18×7-8-14PR	18×7-8-14PR	18×7-8-14PR
3.4	Number of Tyres, Front/Rear(x=drive wheel)	2X/2	2X/2	2X/2	2X/2	2X/2	2X/2
3.5	Tread(centre of tyre), front	b10(mm)	970	970	970	970	970
3.6	Tread(centre of tyre), rear	b11(mm)	960	960	960	960	960

Dimensions							
4.1	Mast Tilt Angle, F/R	α/β(°)	6/10	6/10	6/10	6/10	6/10
4.2	Height with Mast Lowered	h1(mm)					
4.3	Free Lift Height	h2(mm)	150	150	150	150	150
4.4	Lift Height of Rated Weight	h3(mm)	3300	3300	3300	3300	3300
4.5	Lift height	h3(mm)					
4.6	Height with Mast Extended (With load backrest)	h4(mm)					
4.7	Overhead guard height	h6(mm)	2150	2150	2150	2150	2150
4.8	Seat Height	h7(mm)	1130	1130	1130	1130	1130
4.9	Height of Traction pin from ground	h10(mm)	250	250	250	250	250
4.1	Overall length	L1(mm)	3500	3500	3500	3500	3500
4.11	Length to Fork Face	L2(mm)	2430	2430	2430	2430	2430
4.12	Overall Width	b1/b2(mm)	1160/1140	1160/1140	1160/1140	1160/1140	1160/1140
4.13	Fork Size	l/e/s(mm)	1070/122/40	1070/122/40	1070/122/40	1070/122/40	1070/122/40
4.14	Installation level(ISO2328)		2A	2A	2A	2A	2A
4.15	Fork Carriage Width	b3(mm)	1040	1040	1040	1040	1040
4.16	Fork Outside Width	b5(mm)	1000～244	1000～244	1000～244	1000～244	1000～244
4.17	Ground Clearance at mast,Loaded	m1(mm)	120	120	120	120	120
4.18	Ground Clearance at centre of wheelbase ,Loaded	m2(mm)	125	125	125	125	125
4.19	Min. Stacking Aisle Width For pallet 1000*1200MM	mm	3754	3754	3754	3754	3754
	Min. Stacking Aisle Width For pallet 8001200MM	mm	3950	3950	3950	3950	3950
	Other Stacking Aisle Width	mm					
4.2	Turning Radius	Wa(mm)	2100	2100	2100	2100	2100

Performance							
5.1	Travel Speed,loaded/unloaded	km/h	18/19	18/19	14.5/15	14.5/15	12/13
5.2	Lifting Speed,loaded/unloaded	mm/s	380/490	350/490	290/440	290/440	260/400
5.3	Lowering Speed,loaded/unloaded	mm/s	400/400	400/400	400/400	400/400	400/400
5.4	Max. Traction(Load/unload)	N	19000	19000	14000	14000	11000
5.5	Max. Gradeability (Load/unload S2-2min)	%(tanθ)	22/28	20/28	17/26	15/25	15/25
5.6	Acceleration Time,loaded/unloaded(10m)	S					
5.7	Service Brake		Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
	Parking Brake		Mechanical	Mechanical	Mechanical	Mechanical	Mechanical

Drive							
6.1	Drive motor rating S2=60	kw	AC16.6	AC16.6	AC11	AC11	AC11
6.2	Lift motor rating S3=15%	kw	AC21	AC21	AC12	AC12	AC12
6.4	Lead-acid Battery Voltage/ Nominal Capacity)	V/Ah			48/600	48/600	48/500
6.5	Lead-acid Battery Capacity (Optional)	V/Ah			500	500	500
6.6	Maximum Battery Capacity of Side Draw Forklift	Ah			600	600	600
6.5	Lead-acid Battery Weight	kg			920	920	820
6.7	Lithium Battery Voltage/ Nominal Capacity	V/Ah	80/300	80/300	48/300	48/300	48/300
6.8	Lithium Battery Voltage/ Nominal Capacity (Optional)	V/Ah	80/400	80/400	48/460	48/460	48/460
6.9	Lithium Battery Weight	kg	345	345	345	345	345
7.1	Hydraulic system pressure		21.5	21.5	21.5	21.5	21.5

NOTE1: The driving speed,lifting and lowering speed, gradeability, and other parameters in the above table are tested from the standard model with ordinary duplex mast.

NOTE2: The standard model data would vary according to the configuration.

Characteristics							
1.1	Manufacturer	MiMA	MiMA	MiMA	MiMA	MiMA	MiMA
1.2	Model	MK30H	MK35H	MK38H	MK30M	MK35M	MK38M
1.3	Power Type	Battery	Battery	Battery	Battery	Battery	Battery
1.4	Driving style	Seated	Seated	Seated	Seated	Seated	Seated
1.5	Rated load capacity	Q(kg)	3000	3500	3800	3000	3500
1.6	Load center	C(mm)	500	500	500	500	500
1.7	Front overhang	x(mm)	462	467	467	462	467
1.8	Wheelbase	y(mm)	1750	1750	1750	1750	1750

Tyre&Wheels							
3.1	Wheel type	Pneumatic	Pneumatic	Solid Rubber	Pneumatic	Pneumatic	Solid Rubber
3.2	Drive wheel size	28×9-15-14PR	28×9-15-14PR	28×9-15	28×9-15-14PR	28×9-15-14PR	28×9-15
3.3	Load wheel size	18×7-8-14PR	18×7-8-14PR	18×7-8	18×7-8-14PR	18×7-8-14PR	18×7-8
3.4	Number of wheels,front/rear(x=drive wheel)	2X/2	2X/2	2X/2	2X/2	2X/2	2X/2
3.5	Wheel tread,drive side	b10(mm)	1040	1040	1040	1040	1040
3.6	Wheel tread,load side	b11(mm)	990	990	990	990	990

Dimensions							
4.1	Mast Tilting Angle, F/R	α/β(°)	6/10	6/10	6/10	6/10	6/10
4.2	Mast closed height	h1(mm)					
4.3	Free lift height	h2(mm)	155	160	160	155	160
4.4	Lift Height of Rated Capacity	h3(mm)	3300	3300	3300	3300	3300
4.5	Lift Height	h3(mm)					
4.6	Mast extended height with load backrest	h4(mm)					
4.7	Overhead guard height	h6(mm)	2180	2180	2180	2180	2180
4.8	Seat height	h7(mm)	1135	1135	1135	1135	1135
4.9	Height of traction pin from the ground	h10(mm)	330	330	330	330	330
4.1	Overall length	L1(mm)	3617	3622	3622	3617	3622
4.11	Length to fork face	L2(mm)	2547	2552	2552	2547	2552
4.12	Overall width	b1/b2(mm)	1260/1240	1260/1240	1260/1240	1260/1240	1260/1240
4.13	Fork size	l/e/s(mm)	1070/125/45	1070/125/50	1070/125/50	1070/125/45	1070/125/50
4.14	Installation level		3A	3A	3A	3A	3A
4.15	Fork carriage width	b3(mm)	1100	1100	1100	1100	1100
4.16	Fork outside width	b5(mm)	1060～250	1060～250	1060～250	1060～250	1060～250
4.17	Ground Clearance at mast,Loaded	m1(mm)	130	130	130	130	130
4.18	Ground Clearance at centre of wheelbase ,L	m2(mm)	135	135	135	135	135
4.19	Min. Stacking Aisle Width For pallet 1000*12	mm	3884	3889	3889	3884	3889
	Min. Stacking Aisle Width For pallet 800120	mm	4082	4087	4087	4082	4087
	Other Stacking Aisle Width	mm					
4.20	Minimum Turning Radius	Wa(mm)	2220	2220	2220	2220	2220

Performance							
5.1	Travel Speed,loaded/unloaded	km/h	19/20	18/19	17/18	15/15	14/15
5.2	Lifting Speed,loaded/unloaded	mm/s	400/520	380/520	360/520	290/440	280/440
5.3	Lowering Speed,loaded/unloaded	mm/s	400/400	400/400	400/400	400/400	400/400
5.4	Max. Traction(Load/unload)	N	19500	19500	19500	17000	17000
5.5	Max. Gradeability (Load/unload S2-2min)	%(tanθ)	20/28	18/28	15/28	17/26	15/23
5.6	Acceleration Time,loaded/unloaded(10m)	S					
5.7	Service Brake		Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
	Parking Brake		Mechanical	Mechanical	Mechanical	Mechanical	Mechanical

Drive							
6.1	Drive motor rating S2=60	kw	AC16.6	AC16.6	AC16.6	AC15	AC15
6.2	Lift motor rating S3=15%	kw	AC25.5	AC25.5	AC25.5	AC16	AC16
6.3	Lead-acid battery voltage/capacity(standar	V/Ah	/	/	/	80/500	80/500
6.4	Lead-acid battery capacity(optional)	Ah	/	/	/	400	400
6.5	Max. battery capacity for side pull type	Ah	/	/	/	400	400
6.6	Lead-acid Battery weight(standard)	kg	/	/	/	1320	1320
6.7	Lithium battery voltage/capacity(standard)	V/Ah	80/400	80/400	80/400	80/300	80/300
6.8	Lithium battery voltage/capacity(optional)	V/Ah	80/600、 300	80/600、 300	80/600、 300	80/600、 400	80/600、 400
6.9	Lithium Battery weight(standard)	kg	460	460	460	460	460
7.1	Hydraulic system pressure	Mpa	21.5	21.5	21.5	21.5	21.5

NOTE: The driving speed,lifting and lowering speed, gradeability, and other parameters in the above table are tested from the standard model with ordinary duplex mast.

NOTE: The standard model data would vary according to the configuration.

Characteristics					
1.1	Manufacturer	MiMA	MiMA	MiMA	MiMA
1.2	Model	MK30S	MK35S	MK38S	MK40S
1.3	Power Type	Battery	Battery	Battery	Battery
1.4	Driving style	Seated	Seated	Seated	Seated
1.5	Rated load capacity	Q(kg)	3000	3500	4000
1.6	Load center	C(mm)	500	500	500
1.7	Front overhang	x(mm)	462	467	467
1.8	Wheelbase	y(mm)	1750	1750	1750

Weights					
2.1	Service weight(incl.battery)	kg	4798/3678	5136/4016	5466/4336
					5644/4524

Tyre&Wheels					
3.1	Wheel type	Pneumatic	Pneumatic	Solid Rubber	Solid Rubber
3.2	Drive wheel size	28×9-15-14PR	28×9-15-14PR	28×9-15	28×9-15
3.3	Load wheel size	18×7-8-14PR	18×7-8-14PR	18×7-8	18×7-8
3.4	Number of wheels,front/rear(x=drive wheel)	2X/2	2X/2	2X/2	2X/2
3.5	Wheel tread,drive side	b10(mm)	1040	1040	1040
3.6	Wheel tread,load side	b11(mm)	990	990	990

Dimensions					
4.1	Mast Tilting Angle, F/R	α/β(°)	6/10	6/10	6/10
4.2	Mast closed height	h1(mm)			
4.3	Free lift height	h2(mm)	155	160	160
4.4	Lift Height of Rated Capacity	h3(mm)	3300	3300	3300
4.5	Lift Height	h3(mm)			
4.6	Mast extended height with load backrest	h4(mm)			
4.7	Overhead guard height	h6(mm)	2180	2180	2180
4.8	Seat height	h7(mm)	1135	1135	1135
4.9	Height of traction pin from the ground	h10(mm)	330	330	330
4.1	Overall length	L1(mm)	3617	3622	3622
4.11	Length to fork face	L2(mm)	2547	2552	2552
4.12	Overall width	b1/b2(mm)	1260/1240	1260/1240	1260/1240
4.13	Fork size	l/e/s(mm)	1070/125/45	1070/125/50	1070/125/50
4.14	Installation level		3A	3A	3A
4.15	Fork carriage width	b3(mm)	1100	1100	1100
4.16	Fork outside width	b5(mm)	1060~250	1060~250	1060~250
4.17	Ground Clearance at mast,Loaded	m1(mm)	130	130	130
4.18	Ground Clearance at centre of wheelbase ,Loaded	m2(mm)	135	135	135
4.19	Min. Stacking Aisle Width For pallet 1000*1200MM	mm	3884	3889	3889
	Min. Stacking Aisle Width For pallet 8001200MM	mm	4082	4087	4087
	Other Stacking Aisle Width				
4.2	Minimum Turning Radius	Wa(mm)	2220	2220	2220


Performance					
5.1	Travel Speed ,loaded/unloaded	km/h	12/13	12/13	12/13
5.2	Lifting Speed ,loaded/unloaded	mm/s	260/400	260/400	250/400
5.3	Lowering Speed ,loaded/unloaded	mm/s	400/400	400/400	400/400
5.4	Max. Traction(Load/unload)	N	16000	16000	16000
5.5	Max. Gradeability (Load/unload S2~2min)	%(tanθ)	15/24	14/22	12/20
5.6	Acceleration Time ,loaded/unloaded(10m)	S			
5.7	Service Brake	Hydraulic	Hydraulic	Hydraulic	Hydraulic
	Parking Brake	Mechanical	Mechanical	Mechanical	Mechanical

Drive					
6.1	Drive motor rating S2=60	kw	AC15	AC15	AC15
6.2	Lift motor rating S3=15%	kw	AC16	AC16	AC16
6.3	Lead-acid battery voltage/capacity(standard)	V/Ah	80/400	80/400	80/400
6.4	Lead-acid battery capacity(optional)	Ah	500	500	500
6.5	Max. battery capacity for side pull type	Ah	400	400	400
6.6	Lead-acid Battery weight(standard)	kg	1120	1120	1120
6.7	Lithium battery voltage/capacity(standard)	V/Ah	80/300	80/300	80/300
6.8	Lithium battery voltage/capacity(optional)	V/Ah	80/600、 400	80/600、 400	80/600、 400
6.9	Lithium Battery weight(standard)	kg	460	460	460
7.1	Hydraulic system pressure	Mpa	21.5	21.5	21.5


NOTE: The driving speed,lifting and lowering speed,gradeability, and other parameters in the above table are tested from the standard model with ordinary duplex mast.

NOTE: The standard model data would vary according to the configuration.


CAPACITY CHART

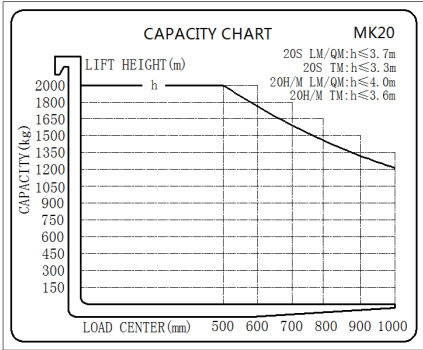


MK20

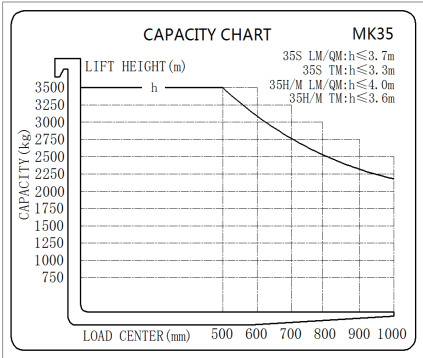


MK35

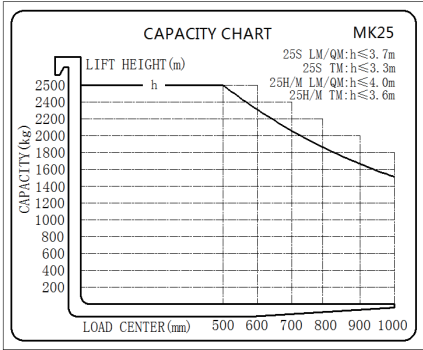


MK25

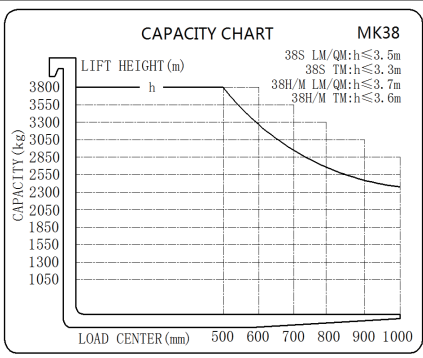

MK38

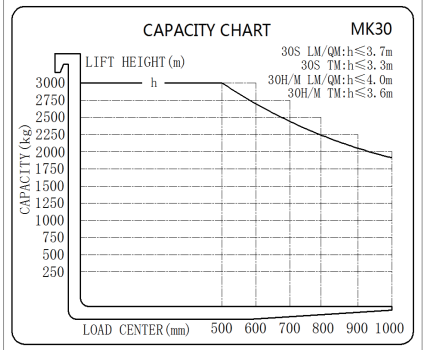

MK30

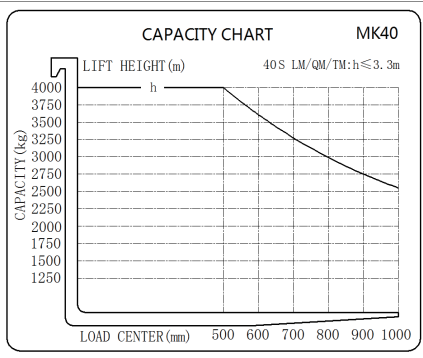

MK40

2D VIEW

